


10PPH3T/LQ+CE...-2B/2K SERIES ELECTRIC PPH VALVE

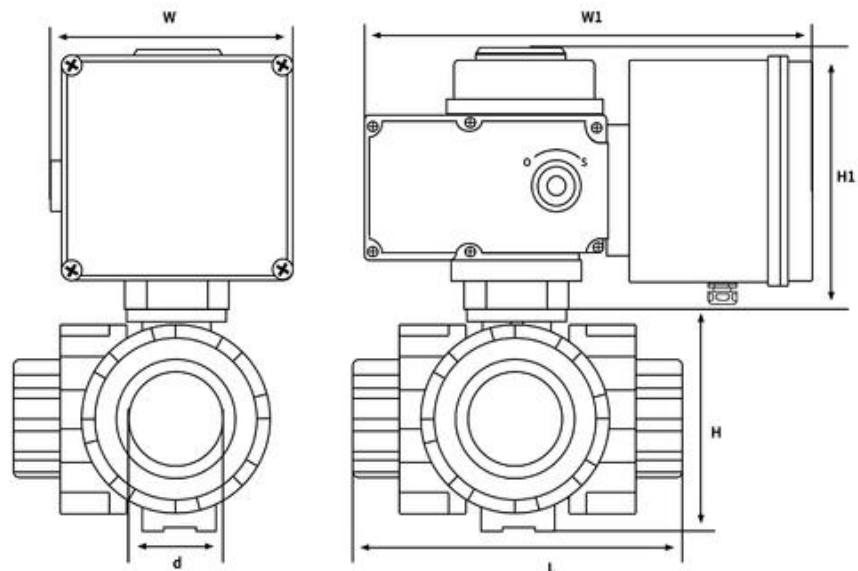


Parameter & Dimensions (mm)

Product Parameter				
Caliber		DN15-DN100 (1/2"-4")		
Voltage		AC220V	DC24V	AC110V
Power		100W	100W	100W
Rated Current		0.6A	1.5A	1.0A
Running Time		26s	8s	26s
Control Type		Two-wire fail-safe open close type		
Pressure		PN10		
O-ring		EPDM (Customized FKM)		
Material	Valve Body	PPH		
	Ball Plate	PPH		
	Seat Sealing	PTFE		
Temperatue		0~80℃ 32~176°F		
Connection Type		True Union Heat Fusion /Threaded		
Applicable Medium		Water, air, oil,weak acid-base solution corrosive medium...		

YIMIER Electric Ball Valve

Model	Caliber	d	W	W1	H1	L	H	Weight (kg)
10PPH3T/LQ+ CEA220-2B/2K 10PPH3T/LQ+ CEA110-2B/2K 10PPH3T/LQ+ CED24-2B/2K	DN15	19	145	250	160	122	63	3.5
	DN20	24	145	250	160	143	75	3.58
	DN25	32	145	250	160	160	82	3.8
	DN32	40	145	250	160	187	95	4.05
	DN40	50	145	250	160	217	111.5	4.9
	DN50	63	145	250	160	226	135	4.97

Three-way Reversing Diagram

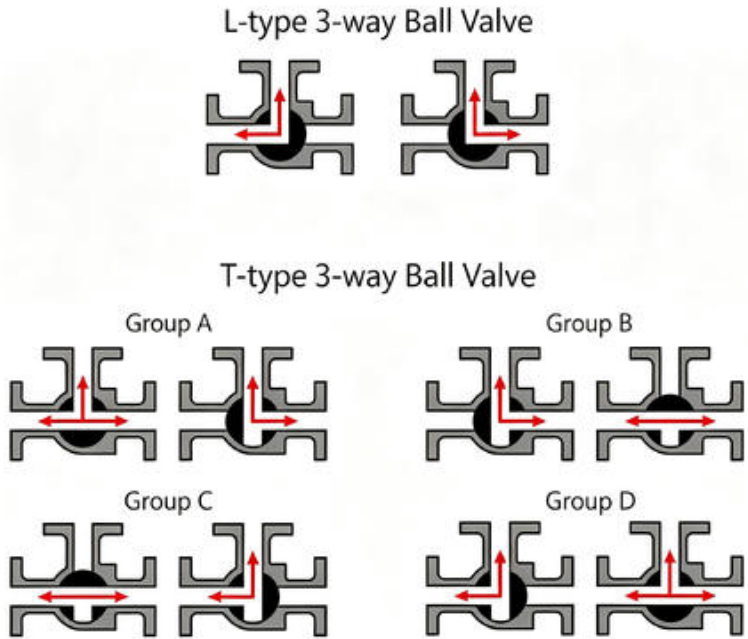

Wiring Diagram

