


16PPS3T/LQ+CE... -2B/2K SERIES ELECTRIC STAINLESS STEEL VALVE

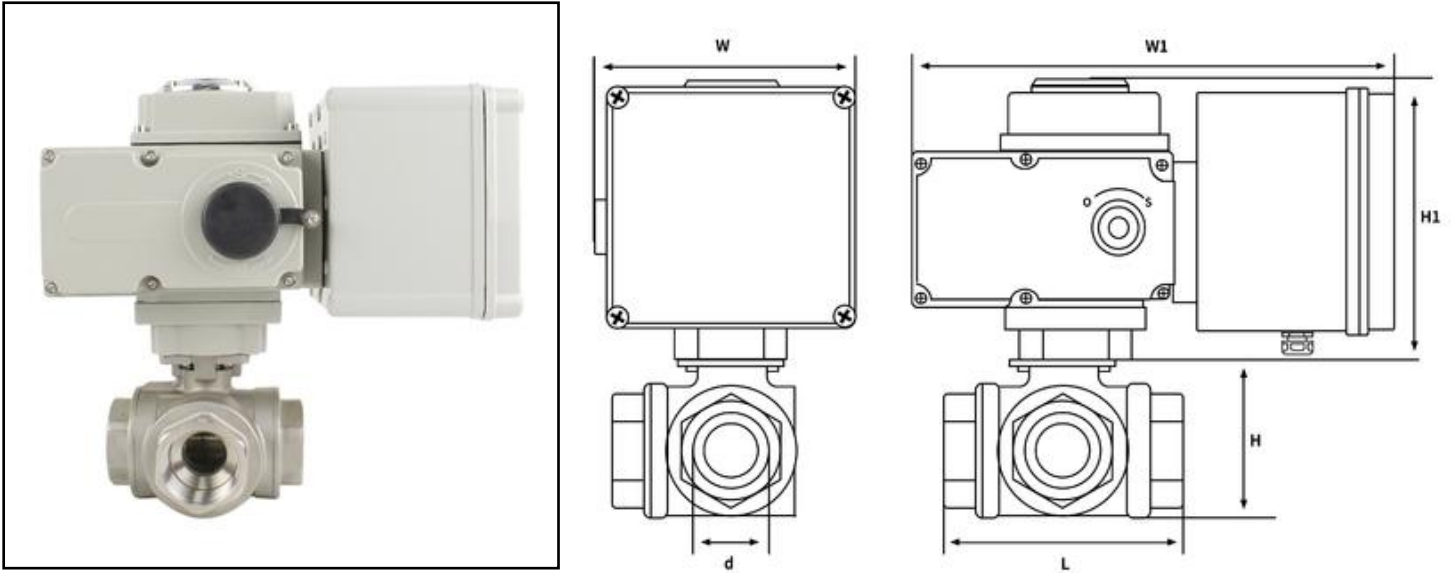

Parameter & Dimensions (mm)


Product Parameter			
Caliber		DN8-DN100 (1/4"-4")	
Voltage		AC220V	DC24V AC110V
Power		100W	100W 100W
Rated Current		0.6A	1.5A 1.0A
Running Time		26s	8s 26s
Control Type		Two-wire fail-safe open close type	
Pressure		PN25	
Material	Valve Body	Stainless Steel 304	
	Ball Plate	Stainless Steel 304	
	Seat Sealing	PTFE	
Temperatue		0~150℃ 32~302°F	
Connection Type		BSPT Thread, NPT Thread	
Applicable Medium		Water, air, oil,weak acid-base solution corrosive medium...	

YIMIER Electric Ball Valve


Model	Caliber	d	W	W1	H1	L	H
16PPS3T/LQ+ CEA220-2K/2B 16PPS3T/LQ+ CEA110-2K/2B 16PPS3T/LQ+ CED24-2K/2B	DN8	10	145	250	160	68	52
	DN10	15	145	250	160	68	52
	DN15	20	145	250	160	68	52
	DN20	25	145	250	160	78	60
	DN25	32	145	250	160	87	70
	DN32	40	145	250	160	141	90
	DN40	50	145	250	160	129	105
	DN50	65	145	250	160	141	115

Three-way Reversing Diagram

L-type 3-way Ball Valve



T-type 3-way Ball Valve

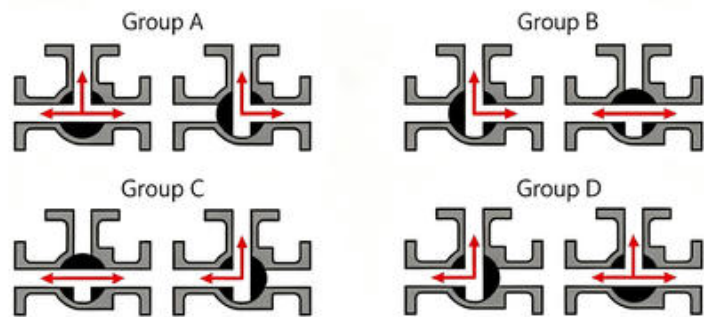

Wiring Diagram

