


16PPSQ+CE...-2B/2K SERIES ELECTRIC STAINLESS STEEL VALVE

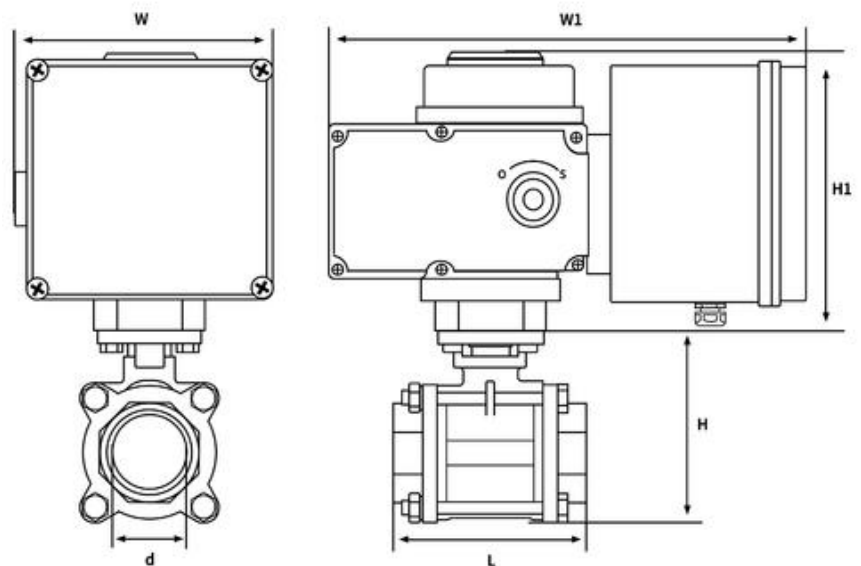

Parameter & Dimensions (mm)

Product Parameter				
Caliber		DN8-DN100 (1/4"-4")		
Voltage		AC220V	DC24V	AC110V
Power		100W	100W	100W
Rated Current		0.6A	1.5A	1.0A
Running Time		26s	8s	26s
Control Type		Two-wire fail-safe open close type		
Pressure		PN25		
Material	Valve Body	Stainless Steel 304		
	Ball Plate	Stainless Steel 304		
	Seat Sealing	PTFE		
Temperatue		0~150°C 32~302°F		
Connection Type		BSPT Thread, NPT Thread		
Applicable Medium		Water, air, oil,weak acid-base solution corrosive medium...		

YIMIER Electric Ball Valve

Model	Caliber	d	W	W1	H1	L	H
16PPSQ+ CEA220-2B/2K 16PPSQ+ CEA110-2B/2K 16PPSQ+ CED24-2B/2K	DN8	10	145	250	160	67	63
	DN10	15	145	250	160	67	63
	DN15	20	145	250	160	67	63
	DN20	25	145	250	160	78	67
	DN25	32	145	250	160	84	79
	DN32	40	145	250	160	101	92
	DN40	50	145	250	160	110	107
	DN50	65	145	250	160	127	120

Wiring Diagram

