

Miniature Safety Valve SMU10L




Product Overview

1. When the medium pressure in the system reaches the set starting pressure of the safety valve, the safety valve will open automatically to relieve the pressure, so as to protect the system When the pressure is lower than the set value, the safety valve will be closed automatically, and the system will operate normally.
2. Suitable for water heater, mold temperature machine, wall-hung boiler, HVAC, mechanical equipment supporting.

Parameters&Dimensions (mm)

Valve body parameters	
Product name	Stainless steel small safety valve
Body material	Stainless steel
Setting pressure	0.03~1.3MPa
Connection method	Threaded connection
Pressure deviation	±10%
Operation temperature	FKM seal: -20~180℃ EPDM seal: -40~110℃

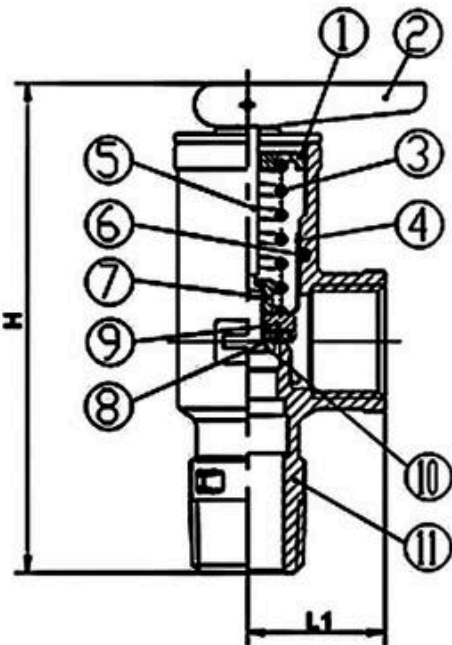

Caliber (mm)		H	L1
DN15	1/2"	84	26
DN20	3/4"	87	30

YIMIER Valve

No.	Name	L
1	Adjusting nut	SS304
2	Handle	SS304
3	Spring	SS304
4	Guide Sleeve	SS304
5	O-ring	FKM/EPDM
6	Valve stem	SS304
7	Fixing nut	SS304
8	Valve core	SS304
9	Valve clack	FKM/EPDM
10	Valve nut	SS304
11	Valve body	SS304