

Stainless Steel Safety Valve with Sealing SU10




Product Overview

1. When the pressure inside the equipment exceeds the allowable value, the valve opens automatically and then discharges at full capacity. When the pressure drops to the specified value, the valve closes automatically to ensure the safe operation of the equipment.
2. Applicable Equipment: Air storage tanks, boilers, steam pipelines, material cooking tanks, heating pots, jacketed pots, glue injection tanks, etc.
3. Fully enclosed, zero leakage of medium, discharged only from the outlet.

Parameters&Dimensions (mm)

Parameters	
Product Tyoe	YMER Safety Valve with Sealing FGX-SSS
Size	DN15-DN50
Body Material	Stainless Steel 316
Setting Pressure	0.1~16 Bar (Over 16 Bar needs customization)
Connection Method	BSP Threaded Connection
Operation Temperature	-20℃~220℃
Applicable Medium	Steam,Water,Oil,Toxic flammable explosive gases and liquids.....

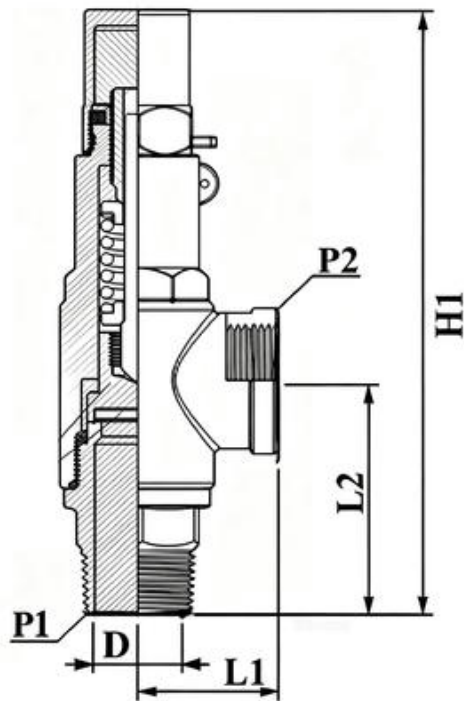

Dimensions							
Caliber	P1	D	P2	Lift	L1	L2	H1
DN15	1/2	15	1	1.04	41	66	179
DN20	3/4	20	1	1.52	41	65	177
DN25	1	21	1	2	41	71	183
DN32	1 1/4	33	2	2.56	65	101	261
DN40	1 1/2	39	2	3.04	65	101	261
DN50	2	39	2	4	65	104	265