

Stainless steel air vent valve Y19-AV





product overview

- 1. Reliable performance, each valve has passed strict exhaust and pressure sealing tests before leaving the factory, individual fittings are made of dewaxed precision casting so as to get perfect assembly, and the valve adopts a special vapor separation design to ensure that there will be no leakage of water when exhausting.
- 2. Stable and sensitive exhaust, as long as the system produces large air bubbles, the exhaust valve will continuously exhaust to ensure that the system works stably.

Parameters&Dimensions (mm)

Valve body parameters	
Product name	Stainless steel air vent valve
Body material	Stainless steel
Working pressure	2~10 Bar
Connection method	BSPT Threaded connection
Operation temperature	FKM seal: -20~180℃ EPDM seal: -40~110℃

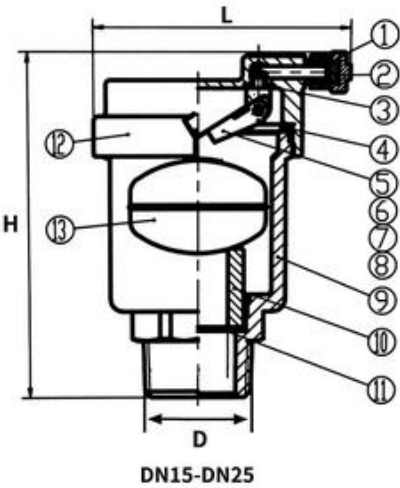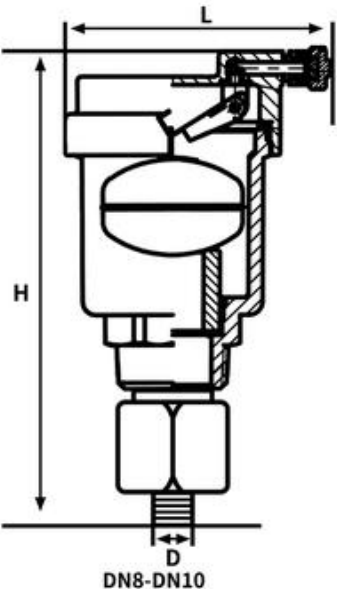

Caliber(mm)	L	H	D
1/4"	64	113	6
3/8"	64	113	8
1/2"	64	86	10
3/4"	64	87	15
1"	64	89.5	22

YIMIER Valve

No.	Name	L
1	Screw cap	SS304
2	Gasket	FKM/EPDM
3	O-ring	FKM/EPDM
4	O-ring	FKM/EPDM
5	Gasket	FKM/EPDM
6	Seal column	SS304/SS316
7	Spring leaf	SS304/SS316
8	Gasket	SS304/SS316
9	Valve body	SS304/SS316
10	Lock nut	SS304
11	Filter net	SS304
12	Valve cover	SS304/SS316
13	Float ball	SS304/SS316