


YIMIER Electric Ball Valve

10UEUD+CE... -2B/2K ELECTRIC BUTTERFLY VALVE

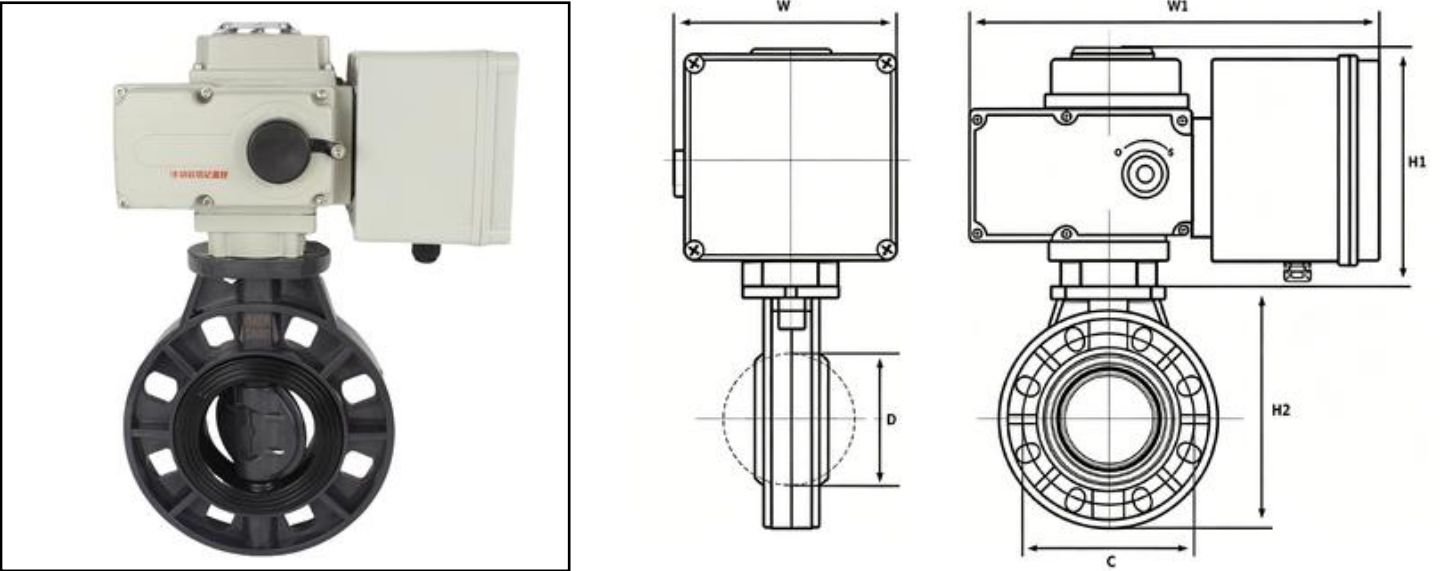

Parameter & Dimensions (mm)

Product Parameter			
Caliber		DN50-DN300 (2"-12")	
Voltage		AC220V	DC24V AC110V
Power		100W	100W 100W
Rated Current		0.6A	1.5A 1.0A
Running Time		26s	8s 26s
Control Type		Two-wire fail-safe open close type	
Pressure		PN10	
Material	Valve Body	UPVC	
	Ball Plate	UPVC	
	Seat Sealing	EPDM	
Temperatue		0~60℃ 32~140°F	
Connection Type		Wafer Type Flange	
Applicable Medium		Water, air, oil,weak acid-base solution corrosive medium...	

YIMIER Electric Ball Valve

Model	Caliber	W	W1	H1	C	D	H2
10UEUD+ CEA220-2K/2B 10UEUD+ CEA110-2K/2B 10UEUD+ CED24-2K/2B	DN50	145	250	160	125	50	178
	DN65	145	250	160	145	65	202
	DN80	145	250	160	195	80	230
	DN100	145	250	160	180	100	264.5
	DN125	145	250	160	210	125	292
	DN150	145	250	160	240	150	318.8
	DN200	145	250	160	295	200	399.5
	DN250	145	250	160	355	250	472.5

Wiring Diagram

