


10UPY3T/LQ+CE...-2B/K SERIES ELECTRIC UPVC VALVE

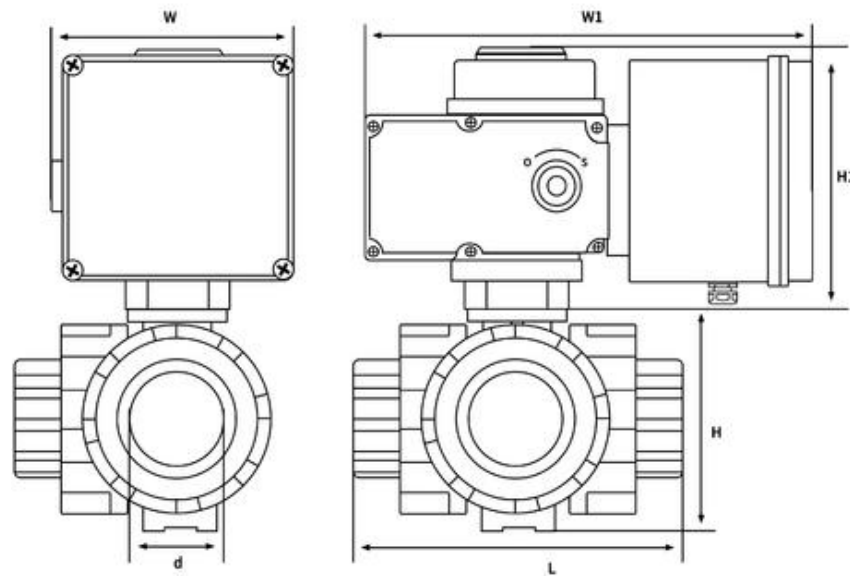

Parameter & Dimensions (mm)


Product Parameter				
Caliber		DN15-DN100 (1/2"-4")		
Voltage		AC220V	DC24V	AC110V
Power		100W	100W	100W
Rated Current		0.6A	1.5A	1.0A
Running Time		26s	8s	26s
Control Type		Two-wire fail-safe open close type		
Pressure		PN10		
O-ring		EPDM (Customized FKM)		
Material	Valve Body	UPVC		
	Ball Plate	UPVC		
	Seat Sealing	PTFE		
Temperatue		0~60℃ 32~140°F		
Connection Type		True Union Solvent Cement / Threaded		
Applicable Medium		Water, air, oil,weak acid-base solution corrosive medium...		

YIMIER Electric Ball Valve


Model	Caliber	d	W	W1	H1	L	H	Weight (kg)
10UPY3T/LQ+ CEA220-2B/2K	DN15	19	145	250	160	137	64	3.63
	DN20	24	145	250	160	172	76	3.89
10UPY3T/LQ+ CEA110-2B/2K	DN25	32	145	250	160	200	82.5	4.04
	DN32	40	145	250	160	208	96	4.52
10UPY3T/LQ+ CED24-2B/2K	DN40	50	145	250	160	240	112.5	5.72
	DN50	63	145	250	160	246	136	5.84

Three-way Reversing Diagram

L-type 3-way Ball Valve

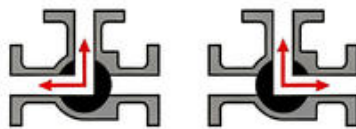

T-type 3-way Ball Valve

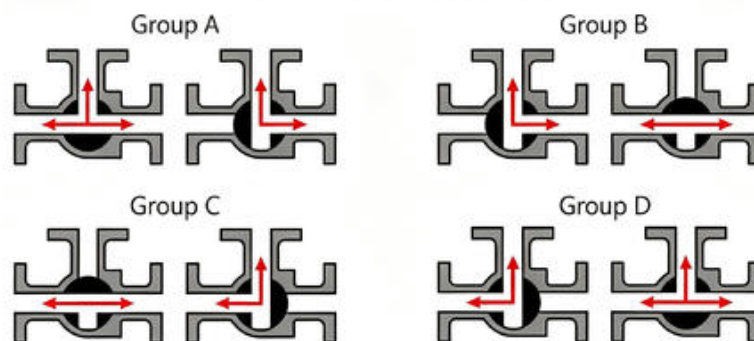

Wiring Diagram

