

Stainless Steel Safety Valve with Lever SU10L




Product Overview

1. When the pressure inside the equipment exceeds the allowable value, the valve opens automatically and then discharges at full capacity. When the pressure drops to the specified value, the valve closes automatically to ensure the safe operation of the equipment.
2. Applicable Equipment: Air storage tanks, boilers, steam pipelines, material cooking tanks, heating pots, jacketed pots, glue injection tanks, etc.
3. Equipped with a handle, allowing manual testing and emergency pressure relief.

Parameters&Dimensions (mm)

Parameters	
Product Tyoe	YMER Spring-loaded Safety Valve with Lever SU10L
Size	DN15-DN80
Body Material	Stainless Steel + Cemented Carbide Spring
Setting Pressure	0.1~1.6MPa
Connection Method	BSP Threaded Connection
Pressure Deviation	±10%
Operation Temperature	≤250℃
Applicable Medium	Steam,Water,Oil,Corrosive Gases and Liquids.....

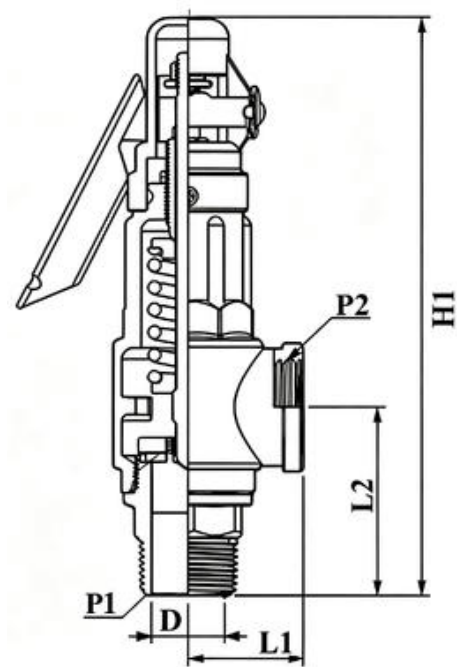

Dimensions							
Caliber	P1	D	P2	Lift	L1	L2	H1
DN15	1/2	15	1	1.04	41	66	200
DN20	3/4	20	1	1.52	41	65	199
DN25	1	21	1	2	41	71	205
DN32	1 1/4	33	2	2.56	65	101	285
DN40	1 1/2	39	2	3.04	65	101	285
DN50	2	39	2	4	65	104	288